

SMT-1734

17" LED Monitor




Key Features

- Support up to 1,280 x 1,024 resolution
- Contrast ratio 1,000 : 1
- Fast response time 5ms
- Video input : HDMI, VGA, BNC
- Tempered glass screen

Dimensions

Unit : mm (inch)

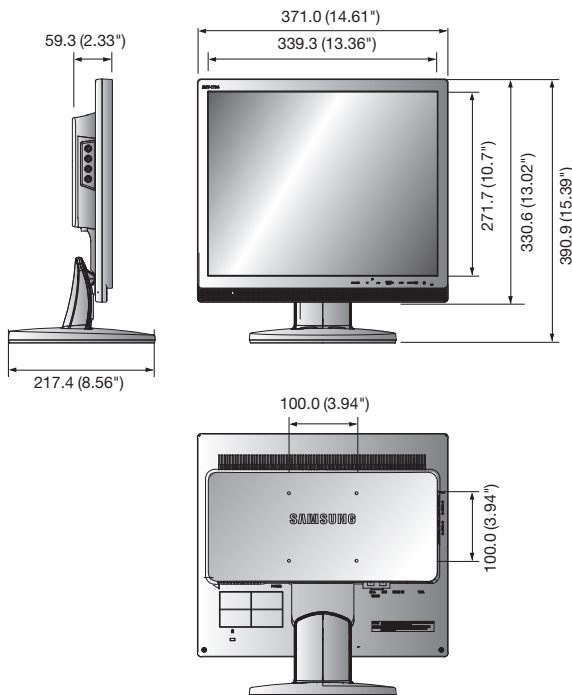

		SMT-1734
DISPLAY		
Type	LED	
Screen Size	17"	
Max. Resolution	1,280 x 1,024	
Brightness	250cd/m ²	
Contrast Ratio	1,000 : 1	
Aspect Ratio	4 : 3	
Viewing Angle (H/V)	170° / 160°	
Display Color	16.7million	
Response Time	5ms	
Video System	NTSC / PAL	
Panel Life	30,000hours	
Filter Type	3D combfilter	
INTERFACE		
Video	Connector	BNC type (2 in)
	Connector	Analogue D-sub (15 pin)
	Input Signal	0.7Vp-p ±5%
RGB / DVI	Available Format	640 x 480@60Hz/72Hz/75Hz (VGA)
		720 x 400@70Hz, 800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA)
		832 x 624@75Hz, 1,024 x 768@60Hz/70Hz/75Hz (XGA)
		1,152 x 864@75Hz, 1,280 x 720@60Hz 1,280 x 960@60Hz, 1,280 x 1,024@60Hz/75Hz (SXGA)
HDMI	Connector	HDMI
	Available Format	640 x 480p@60Hz, 720 x 480p@60Hz, 720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz, 1,920 x 1080p@50Hz/60Hz
Audio	Connector	2 RCA type (2 stereo input)
	Output Signal	Speakers : 2 x 1W
Application Support	Remote controller	
ON SCREEN DISPLAY		
Functions	Samsung UI, VESA™ DPM compatible	
Language	English, French, German, Italian, Spanish, Russian, Portuguese, Dutch, Swedish, Danish, Turkish, Thai, Arabic, Chinese, Japanese, Korean	
GENERAL		
Electrical	Input Voltage	100 ~ 240V AC (50/60Hz)
	Power Consumption	19W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	20% ~ 90% (Non-condensing)
Mechanical	Dimensions with Stand (WxHxD)	371.0 x 390.9 x 217.4mm (14.61" x 15.39" x 8.56")
	Dimensions without Stand (WxHxD)	371.0 x 330.6 x 59.3mm (14.61" x 13.02" x 2.33")
	Bezel Size	Top 19.1mm (0.75") / Bottom 39.7mm (1.56")
	Weight	5.4Kg (11.9 lb)
	LED Protection Glass	Yes
	Cabinet Color	Black
Rack Mounts	Optional	
VESA Mounts Interface	100 x 100mm (3.94" x 3.94")	

* The latest product information / specification can be found at www.samsungsecurity.com